

GENESIS DECKING

COEN
COMPOSITE WOOD
BUILDING A BETTER ENVIRONMENT

Creating beautiful spaces

A premium, fully encapsulated decking board with seven colour tones to suit contemporary homes.



- Dual sided contrasting colours
- Low maintenance
- Quick & easy installation
- Scratch resistant
- Hidden clip system
- R12 & P4 slip rating
- BAL 29 rating
- 25 year warranty



"I can't recommend COEN more highly, I won't be shopping around next time I'm in the market for composite timber."

Trent and Belinda Irvine

GENESIS DECKING

COEN
COMPOSITE WOOD
BUILDING A BETTER ENVIRONMENT




TECHNICAL SPECIFICATIONS

	mm
Dimensions	140 x 25mm x 5.4m
Boards / Pack	70
Minimum ground clearance	100
Minimum clearance over concrete	30
Joist centres (max distance)*	450 - 500
Joist centres - Light Commercial (max distance)*	
Joist centres - Commercial (max distance)*	350-450
Minimum end-gap – butt join	5
Minimum gap – side by side	4
Minimum end gap to solid structure	5
Minimum distance from edge of board for Top fixing	20
Minimum distance from end of board for Top fixing	20
Maximum overhang at end joist	20
Number of SS Starter Clips	one/joist
Number of SS Decking Clips/sqm	22
Top / Face Fix Screw (Typical Decking Screw) size	5x75mm


SOLID DECKING PROFILE

(Shown at 1:2)

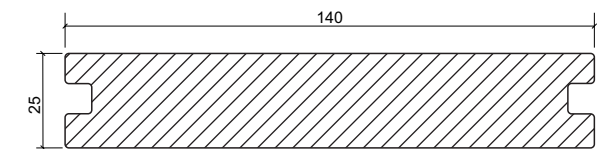

FASCIA BOARD PROFILE

(Shown at 1:2)



COEN
COMPOSITE WOOD

Brisbane, Australia
T 1800 105 031
E info@coen.com.au

SELECT DECKING

COEN
COMPOSITE WOOD
BUILDING A BETTER ENVIRONMENT

Delivering low maintenance style



OAK



JARRAH



ASH GREY



CHARCOAL

A highly durable decking product available in hollow or solid profiles, with easy installation and low maintenance


- Durable with through colour
- Timber grain or brushed finish
- Concealed fixing system
- Solid board designed for high load/commercial applications.
- Water and termite resistant
- Won't splinter
- R12 & P3 slip rating
- 15 year warranty (hollow)
20 year warranty (solid)



SELECT DECKING


COEN
COMPOSITE WOOD
BUILDING A BETTER ENVIRONMENT

SOLID DECKING PROFILE (Shown at 1:2)

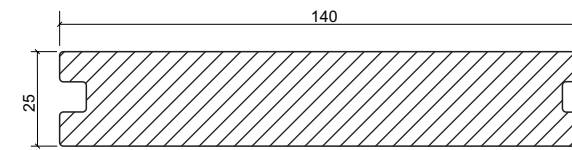

140x25mmx5.4m

HOLLOW DECKING PROFILE (Shown at 1:2)

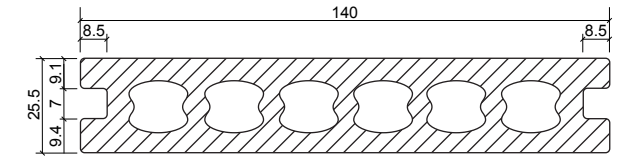

140x25mmx5.4m

TECHNICAL SPECIFICATIONS	Solid Decking (mm)	Hollow Decking (mm)
Dimensions	140 x 25mm x 5.4m	140 x 25mm x 5.4m
Boards / Pack	70	70
Minimum ground clearance	100	100
Minimum clearance over concrete	30	30
Joist centres (max distance)*	450 - 500	400 to 450
Joist centres - Light Commercial (max distance)*		350-400
Joist centres - Commercial (max distance)*	350-450	
Minimum end-gap – butt join	5	5
Minimum gap – side by side	4	4
Minimum end gap to solid structure	5	5
Minimum distance from edge of board for Top fixing	20	
Minimum distance from end of board for Top fixing	20	
Maximum overhang at end joist	20	20
Number of SS Starter Clips	one/joist	one/joist
Number of SS Decking Clips/sqm	22	22
Top / Face Fix Screw (Typical Decking Screw) size	5x75mm	N/A

*If you require confirmation of joist centres on a "uniformly distributed action" and a "concentrated action" for Solid Decking, please contact COEN

In all cases for Hollow Decking, when screwing down do not overdrive screws. Fix with low to medium torque. Fixing too close to the end of the board will cause splitting. DO NOT fix within 15mm of end of board.

COEN
COMPOSITE WOOD

Brisbane, Australia
T 1800 105 031
E info@coen.com.au