

TERRA TOUGH HOLLOW DECKING

COEN
COMPOSITE WOOD
BUILDING A BETTER ENVIRONMENT

Effortless style, built to last



ALKIRA



BEACH



MARINE TEAK




CHOCOLATE

An exceptionally durable decking solution, designed for easy installation and effortless, low-maintenance living. Crafted to withstand the harshest conditions

- Durable with dual colours
- Concealed fixing system
- Low maintainance
- Water and termite resistant
- Scratch resistant
- Won't splinter
- Other colours available on request
- R12 & P4 slip rating
- 15 year warranty




HOLLOW DECKING PROFILE

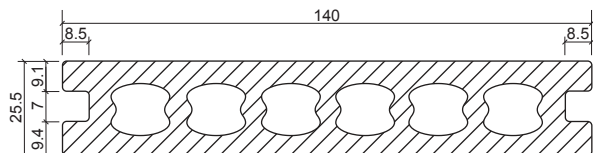


140x25mmx5.4m

SOLID SQUARE EDGE DECKING PROFILE

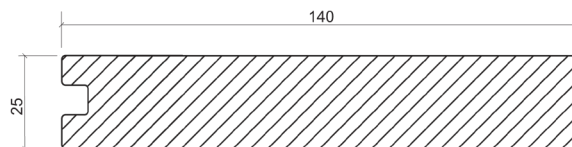

140x25mmx5.4m

FASCIA BOARD PROFILE



140x12mmx5.4m

TECHNICAL SPECIFICATIONS	Solid Edge Decking (mm)	Hollow Decking (mm)
Dimensions	140 x 25mm x 5.4m	140 x 25mm x 5.4m
Boards / Pack	70	70
Minimum ground clearance	100	100
Minimum clearance over concrete	30	30
Joist centres (max distance)*	450 - 500	400 to 450
Joist centres - Light Commercial (max distance)*		350-400
Joist centres - Commercial (max distance)*	350-450	
Minimum end-gap – butt join	5	5
Minimum gap – side by side	3	3
Minimum end gap to solid structure	5	5
Minimum distance from edge of board for Top fixing	20	
Minimum distance from end of board for Top fixing	20	
Maximum overhang at end joist	20	20
Number of SS Starter Clips	N/A	one/joist
Number of SS Decking Clips/sqm	N/A	18
Top / Face Fix Screw (Typical Decking Screw) size	5x75mm	N/A

*If you require confirmation of joist centres on a "uniformly distributed action" and a "concentrated action" for Solid Decking, please contact COEN

In all cases for Hollow Decking, do not screw fix the board.