


HABITAT CLADDING

COEN
COMPOSITE WOOD


Defining outdoor living

Clean design lines with wood grain or sanded finish. Great for the harsh Australian conditions..

- Quick installation
- Long life span
- Won't bow, warp or twist
- Low maintenance
- Fire rated to AS NZ 3837 & AS NZ 1530-3

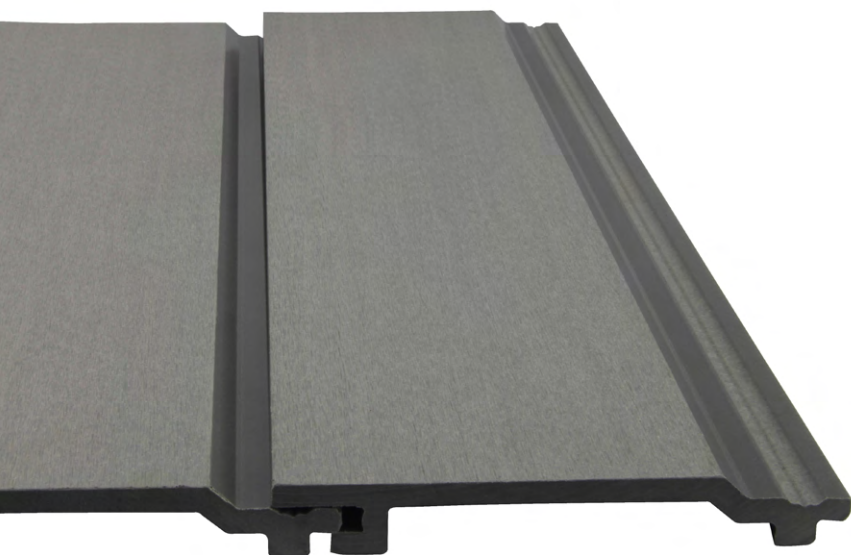

COLOURS EMBOSED & SANDED FINISH

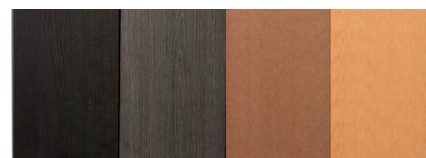


Charcoal Ash Grey Jarrah Oak




HABITAT CLADDING

SHIPLOCK CLADDING PROFILE

(Shown at 1:2)

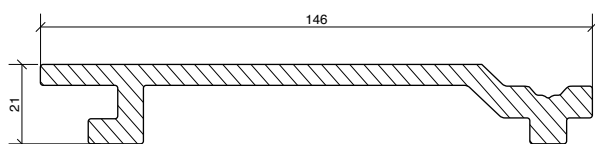


146mm x 21mm x 5.4m

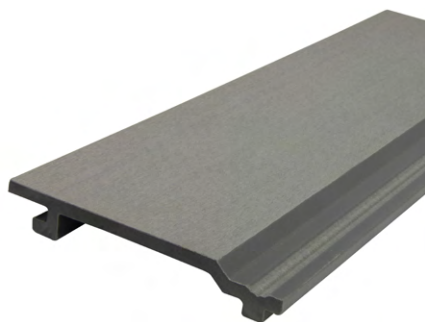

CASTELLATED CLADDING PROFILE

(Shown at 1:2)

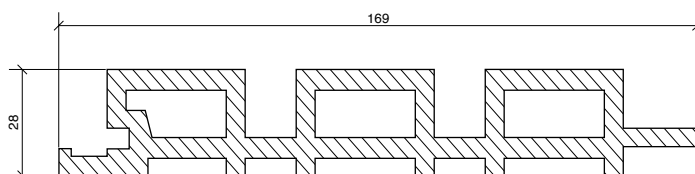

169mm x 28mm



TECHNICAL SPECIFICATIONS	SHIPLOCK	CASTELLATED	Comments
Dimensions	146 x 21mm x 5.4m	169 x 28mm x 5.4m	Embossed or Sanded Finishes
Boards / Pack	70	70	
Minimum ground clearance	100	100	
Minimum clearance over concrete	50	50	
Baton centres (min & max distance) – Domestic	300 to 600	300 to 600	In high wind areas, baton spacing should be 300mm
Baton size	40 X 30	40 X 30	
Baton with but joining	100 X 30	100 X 30	
Minimum end-gap (butt join)	4mm	4mm	
Maximum overhang from last baton	50	50	
Screw distance from cladding board edges	Min 15, max 25	Min 15, max 25	
Joist fastening screws	4 to 5mm x 40 to 60mm pending joist size	4 to 5mm x 40 to 60mm pending joist size	Screws must comply with AS 3566 Self Drilling Screws for the Building and Construction Industries.
Cladding fastening screws	3.5x30 stainless steel	3.5x30 stainless steel	Screws must comply with AS 3566 Self Drilling Screws for the Building and Construction Industries.

COEN
COMPOSITE WOOD

BETTER FOR YOU. BETTER FOR THE ENVIRONMENT.

Brisbane, Australia
T 1800 105 031
E info@coen.com.au
W www.coen.com.au