

SELECT DECKING

COEN
COMPOSITE WOOD



Delivering low maintenance style

A highly durable decking product available in hollow or solid profiles, with easy installation for low maintenance living.


- Durable with through colour construction
- Timber grain or brushed finish
- Concealed fixing system
- Solid board designed for high load/commercial applications.
- Water and termite resistant
- Won't splinter
- R12 & P4 slip rating
- 15 year warranty (hollow)
20 year warranty (solid)



SELECT DECKING

SOLID DECKING PROFILE


(Shown at 1:2)

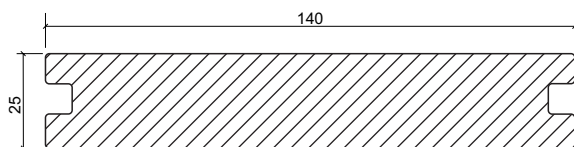

140x25mmx5.4m

HOLLOW DECKING PROFILE

(Shown at 1:2)

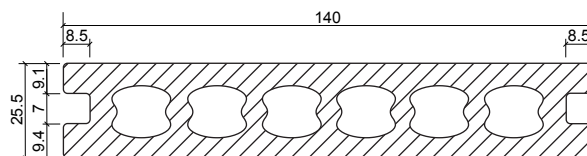

140x25mmx5.4m

TECHNICAL SPECIFICATIONS	Solid Decking (mm)	Hollow Decking (mm)
Dimensions	140 x 25mm x 5.4m	140 x 25mm x 5.4m
Boards / Pack	70	70
Minimum ground clearance	100	100
Minimum clearance over concrete	30	30
Joist centres (max distance)*	450 - 500	400 to 450
Joist centres - Light Commercial (max distance)*		350-400
Joist centres - Commercial (max distance)*	350-450	
Minimum end-gap – butt join	5	5
Minimum gap – side by side	4	4
Minimum end gap to solid structure	5	5
Minimum distance from edge of board for Top fixing	20	
Minimum distance from end of board for Top fixing	20	
Maximum overhang at end joist	20	20
Number of SS Starter Clips	one/joist	one/joist
Number of SS Decking Clips/sqm	22	22
Top / Face Fix Screw (Typical Decking Screw) size	5x75mm	N/A

*If you require confirmation of joist centres on a "uniformly distributed action" and a "concentrated action" for Solid Decking, please contact COEN

In all cases for Hollow Decking, when screwing down do not overdrive screws. Fix with low to medium torque. Fixing too close to the end of the board will cause splitting. DO NOT fix within 15mm of end of board.

COEN
COMPOSITE WOOD

BETTER FOR YOU. BETTER FOR THE ENVIRONMENT.

Brisbane, Australia
T 1800 105 031
E info@coen.com.au
W www.coen.com.au